


A
B
C
D
E
F

FUEL TYPE	EXECUTIONS		
	HFO & MDO & MGO	X	
	MDO & MGO only		X
	MGO only with ≤ 0.1 % sulphur		X

(A)
(A)

Net Weight			0,001	0,001	0,001	SEQ NO	Material ID	Material Name	Dimension, Occ	Standard or Drawing	Basic Material Material Standard	Weight GR./NET
0,001	0,001	0,001										
1	1	1	006	107.246.880.500	CONCEPT GUIDANCE Fuel Oil Treatment	107.24.6.880						0,001
1	1	1	005	107.428.377.500	DISTILLATE FUELS CONCEPT GUIDANCE	107.428.377						0,001
1	1	1	004	107.341.454.500	INSTRUCTION FOR FLUSHING	107.34.1454						0,001
-	-	1	003	PAAD310408	FUEL OIL SYSTEM MGO only, int. pilot fuel supply	DAAD107656						0,001
-	1	-	002	PAAD310405	FUEL OIL SYSTEM MDO&MGO only, int. pilot fuel supply	DAAD107654						0,001
1	-	-	001	PAAD168254	FUEL OIL SYSTEM HFO&MDO&MGO	DAAD053320						0,001

Quantity PER ENGINE	SEQ NO	Material ID	Material Name	Dimension, Occ	Standard or Drawing	Basic Material Material Standard	Weight GR./NET
PAAD168261	PAAD310463	PAAD310464	Free space for lic.			Q-Code XXXXX Standard ISO; JIS	Main Drw. H
Modif.	(A) EAAD090034	23.11.2018					
Material ID	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number



Product
W5-8X62DF

FUEL OIL SYSTEM
Brennstoffsystem

Units	mm kg	NX	Basic Material	Net Weight
SURFACE PROTECTION SEE GROUP 0344	Made	29.07.2014	mhu019 M.Hug	Scale -
TOLERANCING PRINCIPLE ISO8015	Chkd	16.01.2015	wwa008 Wang	Design Group
GENERAL TOLERANCES ACCORDING TO ISO2768-mK	Appd	16.01.2015	bha009 Haag	9723

Size	Page	Material ID	Rev.
A3	1/1	DAAD053318	A


Approved
UID - DIMENSIONAL DRAWING - Confidential

SPECIFICATION which must be met

76	<p>INLET - Pilot fuel oil</p> <p>Fuel oil quality at engine inlet: MDO or MGO</p> <p>Pressure at engine inlet: 7.0 - 8.0 bar</p> <p>Volume flow: according to GTD</p> <p>Viscosity: - Viscosity MDO/MGO: 2-17 cSt</p> <p>Filtration: - One filter unit with max. 10 micron (absolute, sphere passing mesh) close to engine inlet.</p>
77	<p>OUTLET - Pilot fuel oil</p> <p>- Normal operation condition: Returning to feed pump.</p> <p>- Back pressure at engine outlet: max. 1.5 bar(g)</p>

49	<p>INLET - Fuel oil</p> <p>Fuel oil quality at engine inlet: according to specification in Marine Installation Manual (MIM)</p> <p>Pressure at engine inlet: stopped engine: 10 bar running engine: 7-10 bar</p> <p>Volume flow: according to GTD</p> <p>Viscosity: - Viscosity for HFO: 10-20 cSt (recommendation: 13-17 cSt) - Viscosity MDO/MGO : 2-20 cSt</p> <p>Filtration: - At least one filter unit close to the engine inlet. - One filter unit with max. 10 micron (absolute, sphere passing mesh) in the fuel system (either in feed- or booster circuit) - Bypass filter in parallel to the main fuel oil filter with max. 25 micron (absolute, sphere passing mesh)</p> <p>Fuel change-over: - Max. temperature gradient during fuel change-over: 2 °C/min - Fuel amount on engine side: mentioned in table 1 on page 2. - Fuel amount on system side: according to project specific system layout.</p>
50	<p>OUTLET - Fuel return</p> <p>- Normal operation condition: Returning to mixing unit.</p> <p>- Fuel oil change over while engine not in service: Returning to service tank.</p>
51	<p>OUTLET - Drain rail-unit (dirty)</p> <p>- Dirty fuel: Mixed drain (LO,FO) from rail-unit, not for re-use</p> <p>- Free flow by gravity to sludge oil tank or appropriate tank.</p> <p>- Pipe insulated and heated up (50-95 °C)</p>
52	<p>OUTLET - Fuel return, pressureless (clean)</p> <p>- This pressureless fuel return consists of the following 2 types of clean fuel, namely: <u>'Normal drainage'</u> Expected (design) fuel return from the fuel pump and injection control side during normal operation. <u>'Leakage'</u> Unexpected fuel return from an emergency situation only (e.g. high pressure pipe damage).</p> <p>- Clean fuel must be collected in a drain tank (or appropriate tank) by gravity free flow</p> <p>- Piping must be insulated and heated (50-95°C)</p>
59	<p>INLET - Heating medium for fuel oil trace heating</p> <p>- Connected to steam or thermal oil supply</p>
60	<p>OUTLET - Heating medium for fuel oil trace heating</p> <p>- Connected to condensate manifold or thermal oil return</p>

X62DF

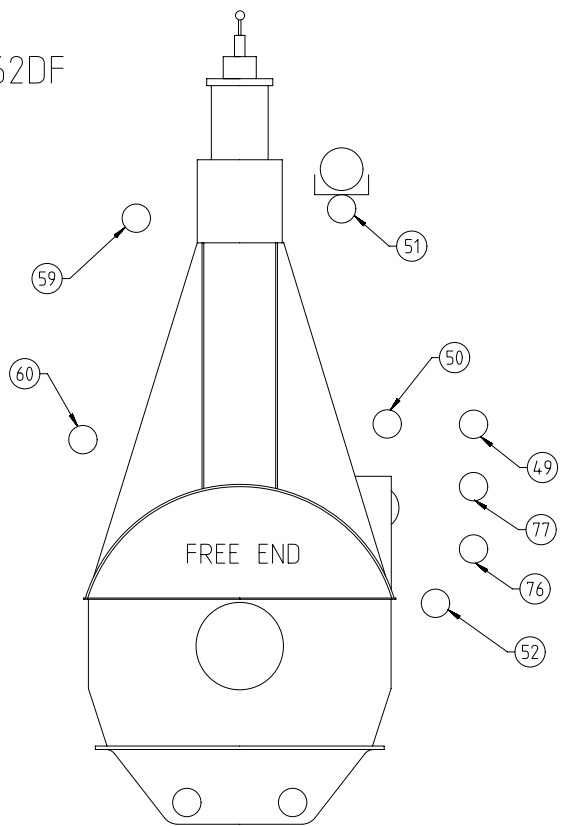

1	008	PAAD100322	MIXING UNIT	DAAD031429		0,001						
QTY	SEQ NO	Material ID	Material Name	Dimension, Occ	Standard or Drawing	Basic Material Material Standard	Weight GR./NET					
Free space for file						Q-Code XXXXXX Standard ISO; JIS	Main Drw.					
Modif.	C	EAAD089573	01.10.2018	D	EAAD090034	08.07.2019	E	EAAD091789	24.09.2020	F	EAAD095177	21.10.2020
	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number	Drawn date		
WINGD Winterthur Gas & Diesel			Product 5-8X62DF	FUEL OIL SYSTEM HFO&MDO&MGO Brennstoffsystem								
Units	mm kg	NX	Basic Material		Net Weight 0,001							
SURFACE PROTECTION SEE GROUP 0344			Made	29.07.2014	mhu019	M.Hug	Scale	-	Size	A2	Page	1/3
TOLERANCING PRINCIPLE ISO8015			Chkd	16.01.2015	wwa008	Wang	Design Group	Material ID		PAAD168254		
GENERAL TOLERANCES ACCORDING TO ISO2768-mK			Appd	16.01.2015	bha009	Haag	9723	Drawing ID	DAAD053320		Rev.	F

SYSTEM PROPOSAL - Main fuel oil supply and fuel oil treatment

Pos.	ENGINE COMPONENTS *3)
EC01	Fuel rail unit
EC02	Fuel supply unit

Possible tank arrangements:

Option 1)
 HFO: 1 settling tank, 1 service tank
 LSHFO: 1 settling tank, 1 service tank
 MDO: 1 settling tank, 1 service tank

Option 2)
 HFO: 2 settling tanks, 1 service tank
 LSHFO: 2 settling tanks, 1 service tank
 MDO: 1 settling tank, 1 service tank

Option 3)
 HFO & LSHFO combined: 2 settling tanks
 HFO: 1 service tank
 LSHFO: 1 service tank
 MDO: 1 settling tank, 1 service tank

Pos.	ENGINE CONNECTIONS *2)
(69)	INLET - Fuel oil
(69)	OUTLET - Fuel return
(61)	OUTLET - Drain rail-unit (dirty)
(62)	OUTLET - Fuel return, pressureless (clean)
(69)	INLET - Heating medium for fuel oil trace heating
(60)	OUTLET - Heating medium for fuel oil trace heating

Number of cylinders		5	6	7	8	
Main engine W-X62DF (R1)	power	(kW)	11925	14370	16695	19080
	speed	(rpm)	103			

Proposal for dimensioning *4)


Mixing unit	volume	(l)	acc. to separate drawing
HFO settling tank	volume	(m ³)	19 23 27 31
HFO service tank	volume	(m ³)	19 23 37 31
MDO/MGO service tank	volume	(m ³)	19 23 27 31
MDO/MGO drain tank *11)	volume	(m ³)	1.9 2.3 2.7 3.1

Nominal pipe diameter	A	DN	50	50	65	65
	B	DN	40	40	40	50
	C	DN	40	50	50	50
	D	DN	65	65	80	80
	E	DN	50	65	65	65

- I Both valves to be interconnected
- II Changeover LSHFO and HFO for fuel treatment
- III Changeover LSHFO and HFO for ME operation
- IV Changeover MDO and MGO for ME operation

Table's Fuel amount on engine side

Cylinder	Volume
5	21 l
6	21 l
7	21 l
8	29 l

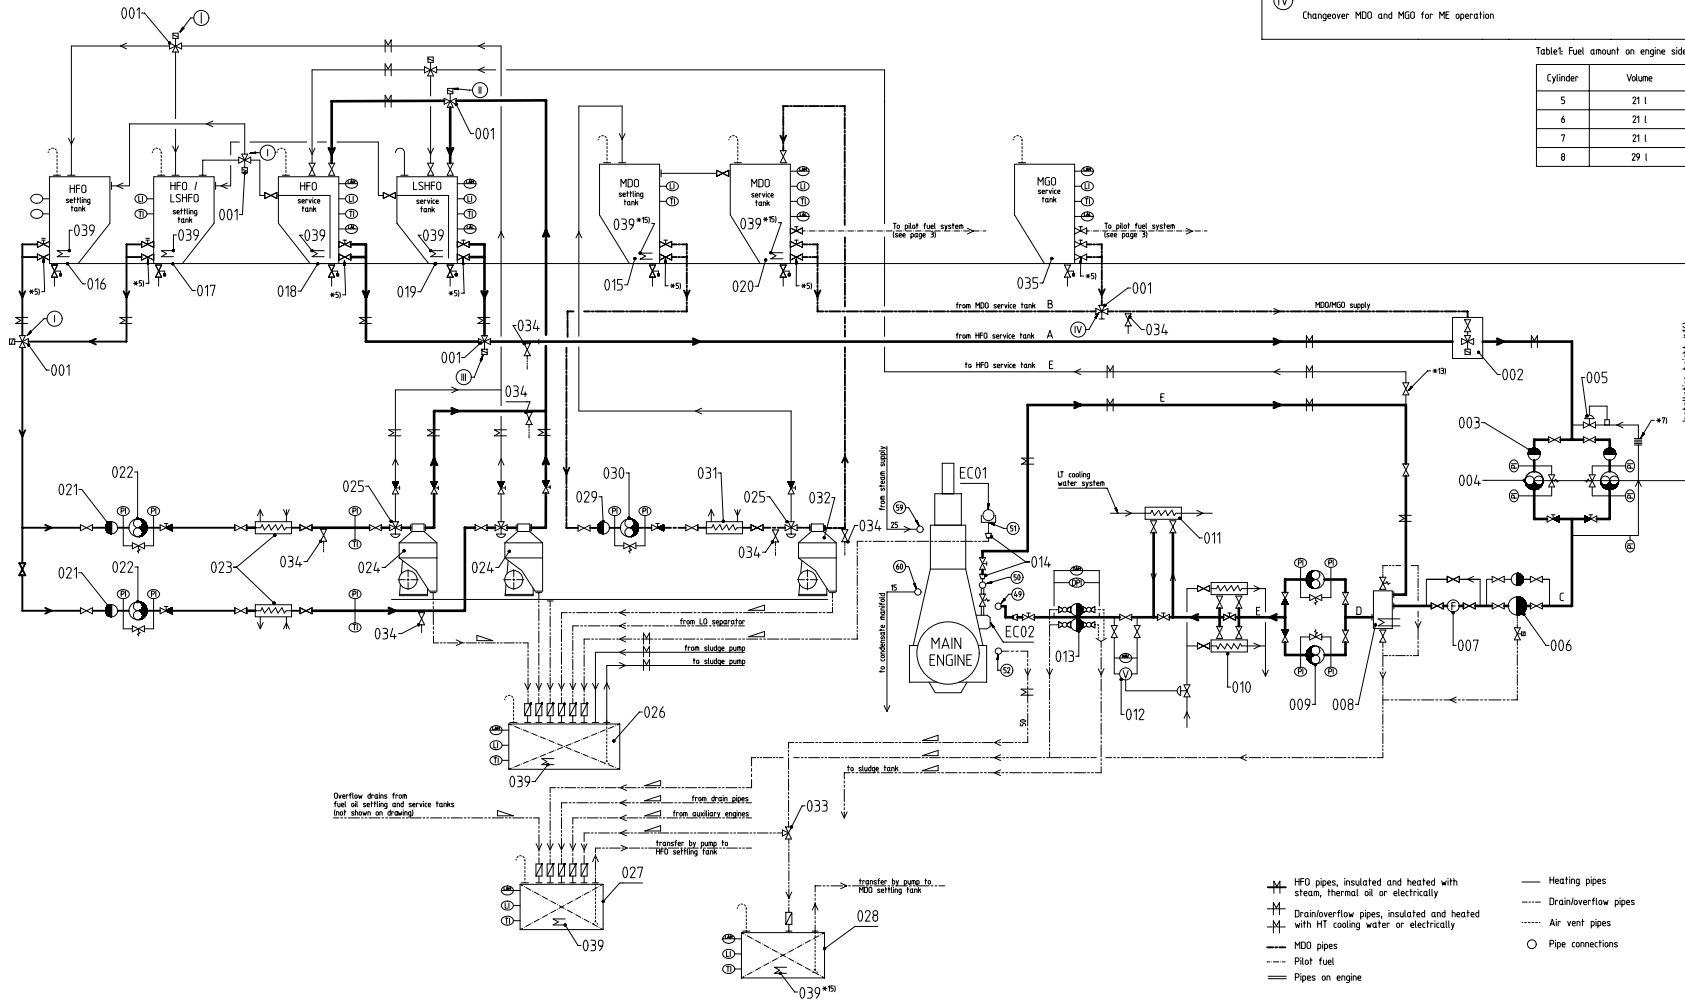

Pos.	SYSTEM COMPONENTS *1)
001	Three-way valve, manually or remotely operated
002	Automatic fuel change-over unit
003	Suction strainer (mesh size acc. to pump suppliers requirement)
004	Low pressure feed pump
005	Pressure regulating valve
006	Automatic self-cleaning filter, 10 micron, heated (trace heating acceptable)
007	Flowmeter
008	Mixing unit, heated and insulated (according to separate drawing as linked on page 1)
009	High pressure booster pump
010	Fuel oil end-heater
011	MDO/MGO heat exchanger
012	Viscosimeter
013	Fuel oil filter, 25 micron, heated (trace heating acceptable)
014	Transition Piece (adapter) *10)
015	MDO settling tank, heated and insulated
016	HFO settling tank, heated and insulated
017	LSHFO settling tank, heated and insulated
018	HFO service tank, heated and insulated
019	LSHFO service tank, heated and insulated
020	MDO service tank
021	Suction strainer (mesh size acc. to pump suppliers requirement)
022	HFO/LSHFO separator supply pump, with safety valve
023	HFO/LSHFO pre-heater
024	Self-cleaning HFO/LSHFO separator *6)
025	Three-way valve, diaphragm operated
026	Sludge tank
027	Fuel oil drain tank *12)
028	MDO/MGO drain tank *11) *12)
029	Suction strainer (mesh size acc. to pump suppliers requirement)
030	MDO separator supply pump, with safety valve
031	MDO pre-heater
032	Self-cleaning MDO separator *6)
033	Three-way valve for switching between fuel drain tank and MDO/MGO clean leakage tank *9)
034	Fuel sampling cock *8)
035	MGO service tank
039	Heating coil

- Remarks:**
- All heaters to be fitted with thermometers, relief valves, drains and drip trays. Not shown on drawing.
 - Steam traces on main engine are laid out for 7 bar saturated steam.
 - Air vent and drain pipes must be fully functional at all inclination angles of the ship at which the engine must be operational.
 - Overflow and drain pipes for fuel oil tanks are not shown.

- *1) To be delivered by external suppliers and to be installed by the shipyard.
- *2) Refer to the "Pipe Connection Plan" for the execution and location of the engine pipe connections.
- *3) To be delivered by the engine manufacturer, i.e. already equipped on engine side.
- *4) All capacities and the given diameters are valid for the mentioned engine rating and serve just as an example. The given tank capacities are based on 8 h settling tank change-over intervals. To make the layout for the project specific, ratings please refer to design group 9730 "Fluid velocities and flow rates," recommended values for pipe work of diesel plants," rating specific flow rates are provided by GTD.
- *5) Valve to be kept closed during normal engine operation. For draining only.
- *6) Separator capacity related to viscosity; layout according to certified flow rate (CFR) recommended.
- *7) The return line must be fully exposed to air without any insulation and equipped with cooling ribs or other type of radiative cooler.
- *8) Recommended position for fuel oil sampling to check fuel oil quality.
- *9) Just to be applied if in addition to the fuel drain tank a separate tank for collection of clean MDO/MGO is installed to enable the switching between the different tanks depending on the fuel in use.
- *10) Installed as required (check with "Pipe Connection Plan").
- *11) The normal drainage rate of MDO/MGO is significantly higher than the normal drainage rate of HFO. Therefore during long-term operation on MDO/MGO the collection of clean MDO/MGO in a separate drain tank is highly recommended. Regarding the tank size we recommend a volume which is approx. 10% of the volume of the MDO/MGO service tank. The design volume of the MDO/MGO drain tank considers a combination of normal drainage and unexpected emergency leakage.
- *12) The tank inlet only to be equipped with a swing check valve to avoid inadmissible backpressure.
- *13) Close during normal engine operation.
- *14) The tank inlet is only to be equipped with a swing check valve to avoid inadmissible backpressure.
- *15) A heating coil in the MDO tank is required when DM is used. Target heating temperature: 40 °C.
- *16) The location of pump's installation must comply with the supplier's requirements by considering the relative height between the pump and the service tank, in combination with the pressure drop of the piping.

- HFO pipes, insulated and heated with steam, thermal oil or electrically
- Heating pipes
- Drain/overflow pipes
- Drain/overflow pipes, insulated and heated with HT cooling water or electrically
- Air vent pipes
- MDO pipes
- Pilot fuel
- Pipes on engine
- Pipe connections


<p>WING</p> <p>Member No 2</p>	<p>FUEL OIL SYSTEM</p> <p>HFO&MDO&MGO</p> <p>Brennstoffsystem</p>
<p>Scale: 1/20</p> <p>Sheet: 1/2</p> <p>Design: PAAD168254</p> <p>Number: DAAD053320</p>	<p>DATE: 01.10.2019</p> <p>DATE: 07.07.2019</p> <p>DATE: 01.09.2020</p> <p>DATE: 01.09.2020</p>

SYSTEM PROPOSAL - Pilot fuel supply

Pos.	ENGINE CONNECTIONS *2)
76	INLET - Pilot fuel
77	OUTLET - Pilot fuel

Pos.	SYSTEM COMPONENTS *1)
014	Transition Piece (adapter) *10)
020	MDO service tank
035	MGO service tank
039	Heating coil
045	Three-way valve, pilot fuel supply, manually or remotely operated
046	Suction strainer (mesh size acc. to pump suppliers requirement)
047	Pilot fuel feed pump
048	Pilot fuel cooler and/or heater
049	Viscometer
050	Fuel oil filter, max. 10 micron (absolute, sphere passing mesh)

Number of cylinders		5	6	7	8
Main engine W-X62DF (R1)	power (kW)	11925	14310	16695	19080
	speed (rpm)	103			
Proposal for pipe dimensioning *3)					
Nominal pipe diameter	G DN	20	20	20	20
	H DN	20	20	20	20

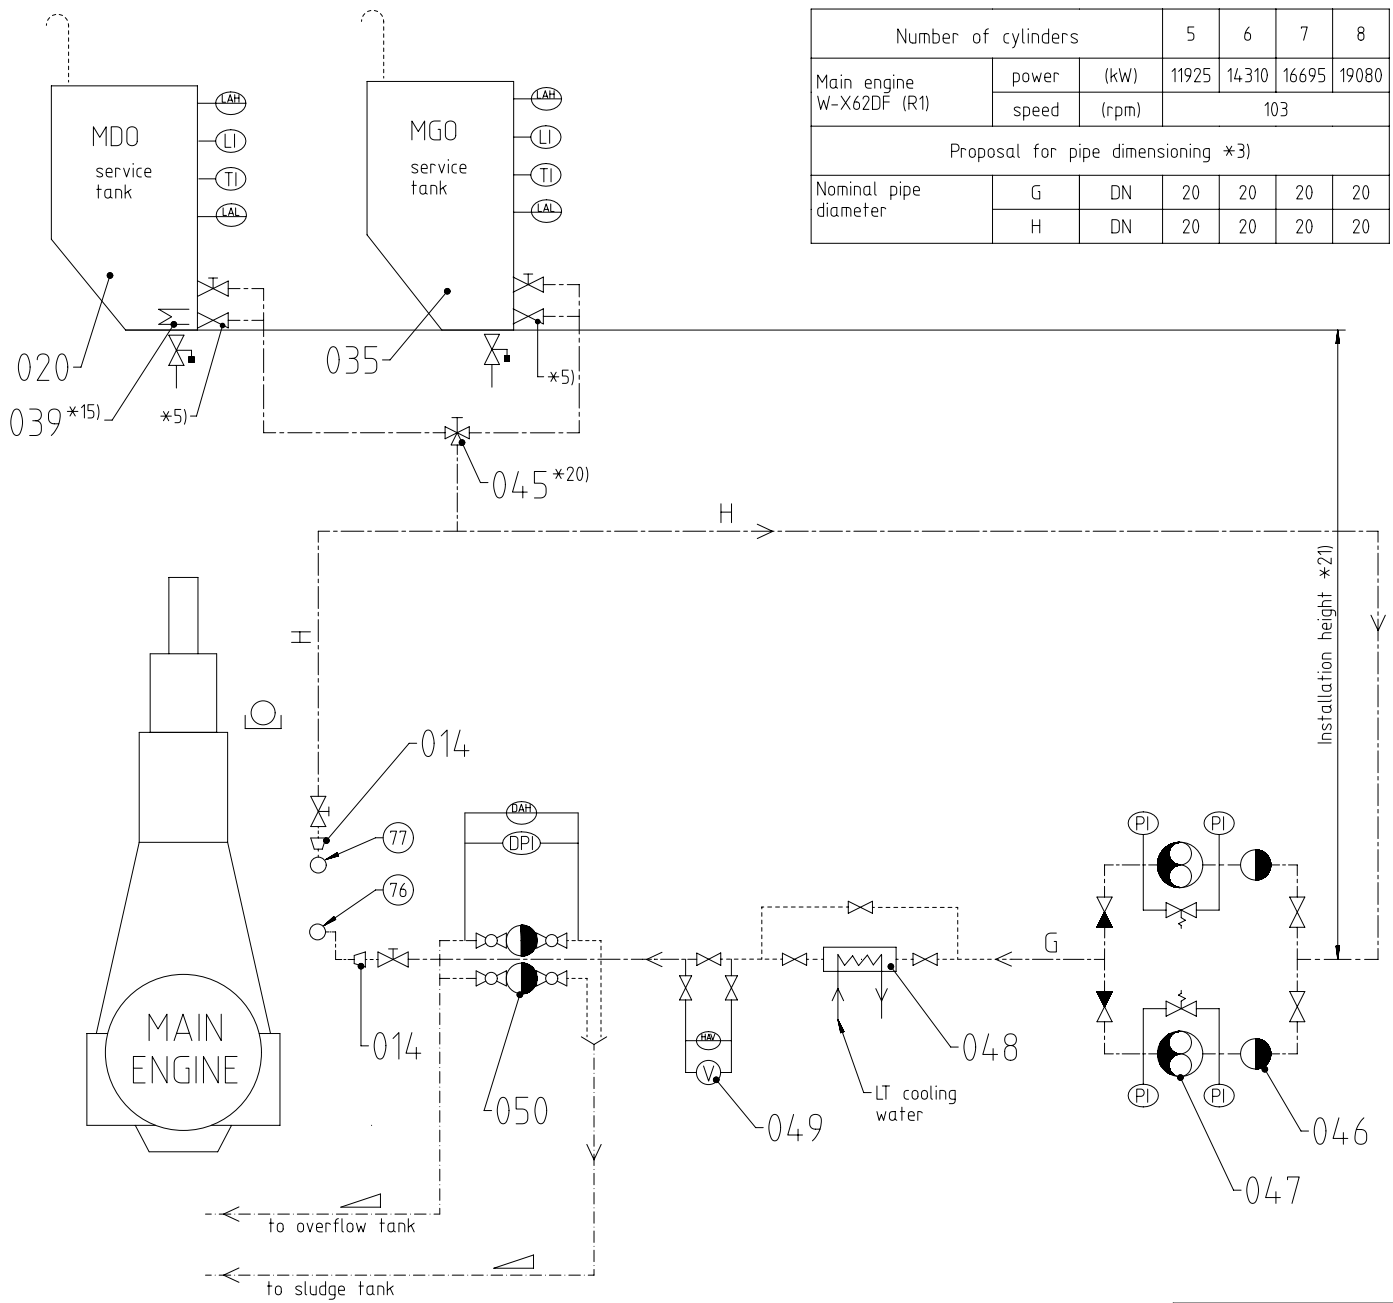

Remarks

- Air vent and drain pipes must be fully functional at all inclination angles of the ship at which the engine must be operational.
- Overflow and drain pipes for fuel oil tanks are not shown

*1) To be delivered by external supplier and to be installed by the shipyard.

*2) Refer to the "Pipe Connection Plan" for the execution and location of the engine pipe connections.

*3) All capacities and the given diameters are valid for the mentioned engine rating and serve just as an example. To make the layout for the project specific rating please refer to design group 9730 "Fluid velocities and flow rates, recommended values for pipework of diesel plants" Rating specific flow rates are provided by GTD.

*5) Valve to be kept closed during normal engine operation. For draining only.

*10) Installed as required (check with the "Pipe Connection Plan").

*15) A heating coil in the MDO tank is required when DMB is used. Target heating temperature: 40 °C.

*20) Only to be installed if different pilot fuel qualities are used to enable the changeover.

*21) The location of the pump's installation must comply with the supplier's requirements by considering the relative height between the pump and the service tank, in combination with the pressure drop of the piping


Free space for file		Q-Code XXXXXX		Main Draw.	
Standard ISO; JIS					
Modif. C	EAAD089573	01.10.2018	Modif. D	EAAD090034	08.07.2019
Number	EAAD091789	24.09.2020	Number	EAAD095177	21.10.2020
Drawn date			Drawn date		
Product 5-8X62DF		FUEL OIL SYSTEM HFO&MDO&MGO Brennstoffsystem			
Units mm kg NX		Basic Material		Net Weight 0,001	
SURFACE PROTECTION SEE GROUP 0344		Made 29.07.2014	mhu019	M.Hug	Scale -
TOLERANCING PRINCIPLE ISO8015		Chkd 16.01.2015	wwa008	Wang	Design Group
GENERAL TOLERANCES ACCORDING TO ISO2768-mK		Appd 16.01.2015	bha009	Haag	9723
		Size A2		Page 3/3	Material ID PAAD168254
		Drawing ID DAAD053320		Rev. F	

1 2 3 4 5 6 7 8

SPECIFICATION which must be met

- 76 INLET - Pilot fuel oil
 - Fuel quality, pressure and viscosity: same as the main fuel oil. (connection 49)
 - Volume flow: according to GTD.
- 77 OUTLET - Pilot fuel oil return
 - Normal operation condition: returning to FO supply pump suction.
 - Back pressure at ME outlet: max. 1.5 bar(g)

X62DF

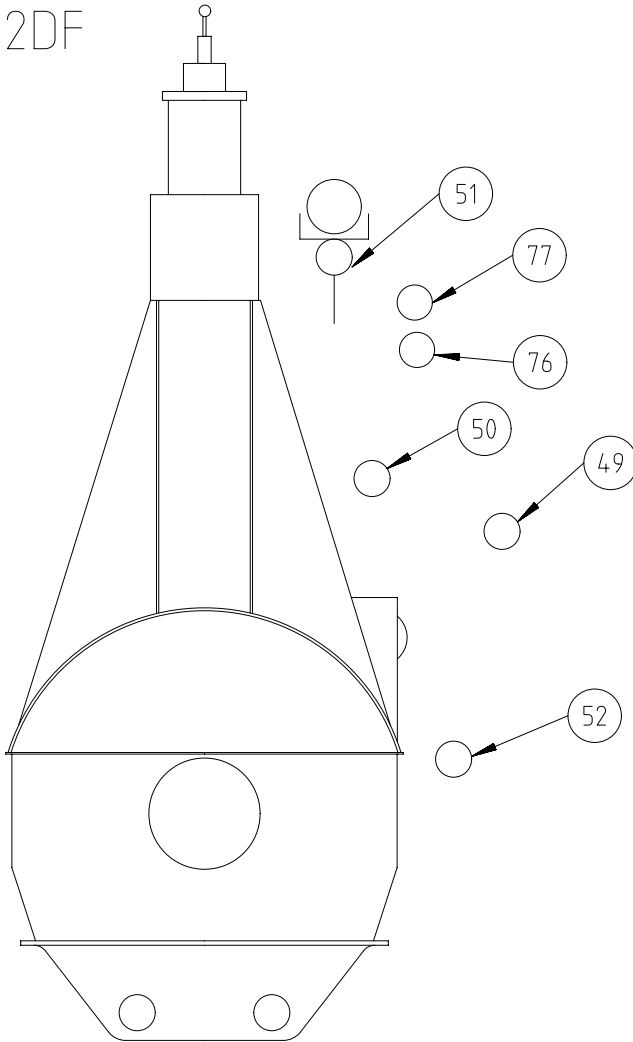

- 49 INLET - Fuel oil
 Fuel oil quality: MDO with sulphur content: $\leq 0.5\%$
 AND
 MGO with sulphur content: $\leq 0.1\%$
 Pressure at engine inlet: stopped engine: 10 bar
 running engine: 7-10 bar
 Volume flow: according to GTD
 Viscosity MDO/MGO: 2-17 cSt
 Filtration:
 - Main fuel oil filter with max. 10 micron (absolute, sphere passing mesh) close to engine inlet.
 - Bypass filter in parallel to the main fuel oil filter with max. 25 micron (absolute, sphere passing mesh).
 Fuel change-over:
 - Max. temperature gradient during fuel change-over: 2 °C/min
 - Fuel amount on engine side: mentioned in table 1 on page 2.
 - Fuel amount on system side: According to project specific system layout.
- 50 OUTLET - Fuel return
 - Normal operation condition: returning to upstream of the FO supply pump.
- 51 OUTLET - Drain rail-unit (dirty)
 - Dirty fuel: Mixed drain (LO,FO) from rail-unit, not for re-use
 - Free flow by gravity to sludge oil tank or appropriate tank.
- 52 OUTLET - Fuel return, pressureless (clean)
 - This pressureless fuel return consists of the following 2 types of clean fuel, namely:
 'Normal drainage'
 Expected (design) fuel return from the fuel pump and injection control side during normal operation.
 'Leakage'
 Unexpected fuel return from an emergency situation only (e.g. high pressure pipe damage).
 - Clean fuel must be collected in a drain tank (or appropriate tank) by gravity free flow
 - Piping must be insulated and heated (50-95°C)

Free space for lic.	Q-Code XXXXXX							Main Drw.
	Standard ISO; JIS							

Modif.	A	EAAD091789	02.12.2019						
	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number

	Product 5-8X62DF	FUEL OIL SYSTEM MDO&MGO only, int. pilot FO supply	
		Brennstoffsystem Hauptkreislauf	

Units	mm kg	NX		Basic Material	Net Weight 0,001
-------	-------	----	--	----------------	------------------

SURFACE PROTECTION SEE GROUP 0344	Made	23.10.2018	Sudant Deogade	Scale	-	Size	A3	Page	1/2	Material ID	PAAD310405
TOLERANCING PRINCIPLE ISO8015	Chkd	05.07.2019	wwa008 Wang	Design Group	9723	Drawing ID	DAAD107654	Rev.	A		
GENERAL TOLERANCES ACCORDING TO ISO2768-mK	Appd	05.07.2019	mhu019 Hug								

Approved
 DIM - DIMENSIONAL DRAWING - Confidential

SYSTEM PROPOSAL - Combined main fuel oil and pilot fuel supply + MDO treatment


Pos.	ENGINE COMPONENTS *3)
EC01	Fuel supply unit
EC02	Fuel rail unit
EC03	Pressure retaining valve
EC04	Pilot fuel supply unit
EC05	Pressure reduction valve

Pos.	ENGINE CONNECTIONS *2) (A)
(49)	INLET - Fuel oil
(50)	OUTLET - Fuel return
(51)	OUTLET - Drain rail-unit (dirty)
(52)	OUTLET - Fuel return, pressureless (clean)
(76)	INLET - Pilot fuel oil
(77)	OUTLET - Pilot fuel oil return

Number of cylinders		5	6	7	8
Main engine X62DF (R1 rated)	power (kW)	11925	14310	16695	19080
	speed (rpm)	103			
Proposal for dimensioning *4)					
Mixing unit	volume (l)	acc. to separate drawing			
MDO/MGO service tank	volume (m³)	19	23	27	31
MDO/MGO drain tank	volume (m³)	19	2.3	2.7	3.1
Nominal pipe diameter	A	DN 32	4.0	4.0	5.0
	B	DN 32	4.0	4.0	5.0
	C	DN 32	4.0	4.0	5.0
	E	DN 32	32	4.0	4.0
	F	DN 32	32	4.0	4.0
	G	DN 20	20	20	20
	H	DN 20	20	20	20
	H	DN 20	20	20	20

Tablet: Fuel amount on engine side

Cylinder	Volume
5	21 l
6	21 l
7	21 l
8	29 l

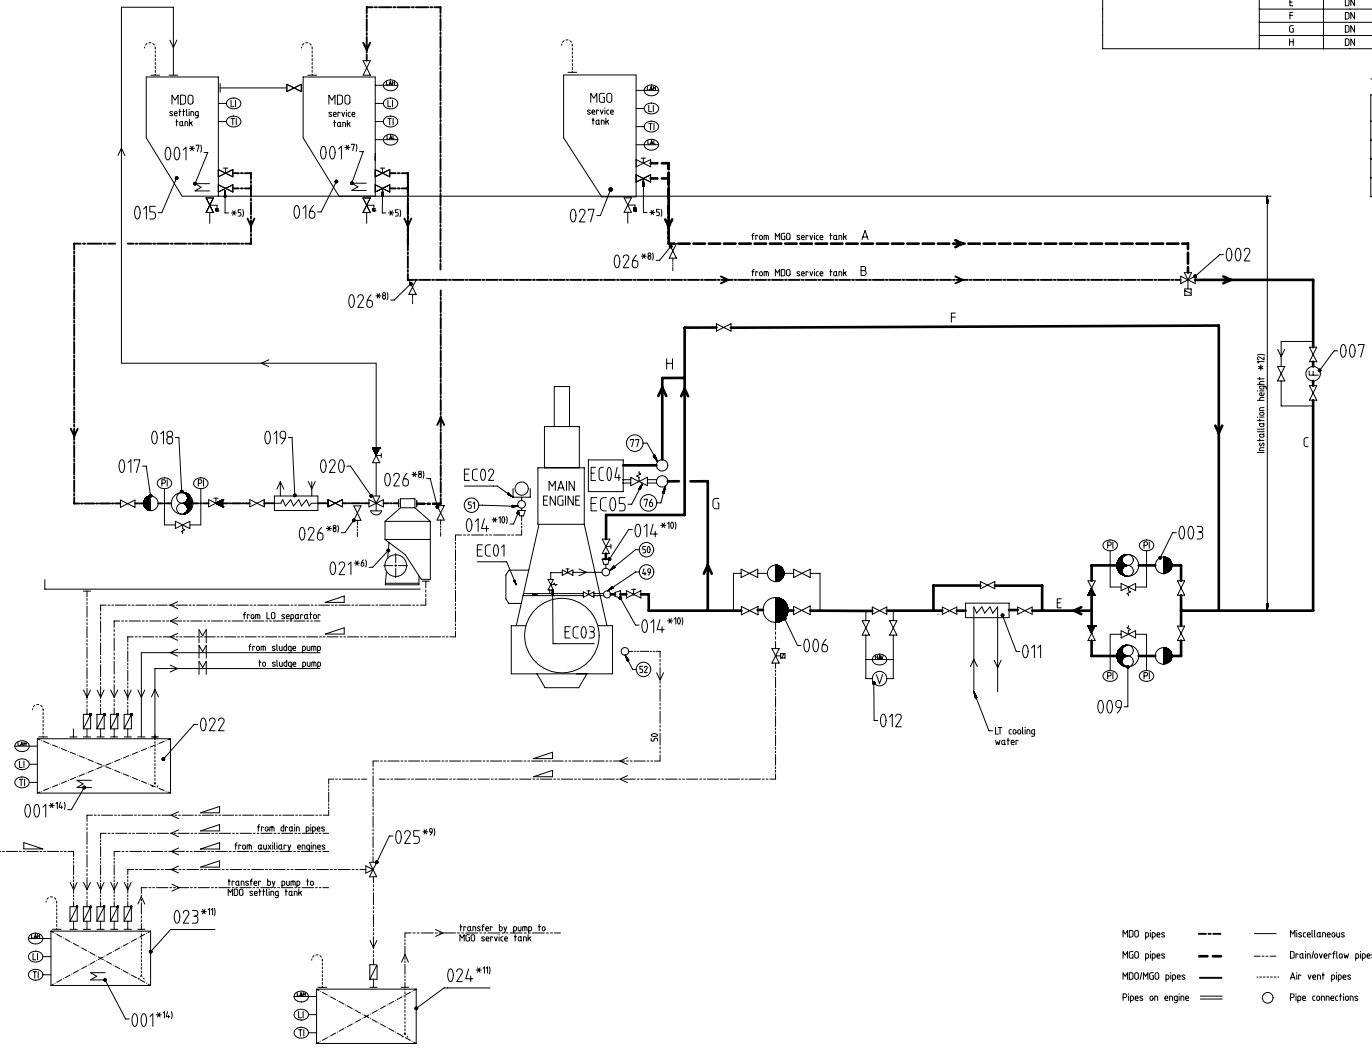

Pos.	SYSTEM COMPONENTS *1)
001	Heating coil *14)
002	Change-over valve
003	Suction strainer (mesh size according to pump suppliers requirement)
006	Automatic self-cleaning filter, 10 micron (absolute sphere passing mesh size)
007	Flowmeter
009	FO supply pump
011	Fuel oil cooler and/or heater (A)
012	Viscometer
014	Transition piece (adapter) *10)
015	MDO settling tank, heated and insulated
016	MDO service tank
017	Suction strainer (mesh size acc. to pump suppliers requirement)
018	MDO separator supply pump, with safety valve
019	MDO pre-heater
020	Three-way valve, diaphragm operated
021	Self-cleaning MDO separator *6)
022	Sludge tank
023	Fuel oil drain tank *11)
024	MGO clean leakage tank *11)
025	Three-way valve for switching between fuel drain tank and MDO/MGO clean leakage tank *9)
026	Fuel sampling cock *8)
027	MGO service tank

- Remarks
- Air vent and drain pipes must be fully functional at all inclination angles of the ship at which the engine must be operational.
 - Overflow and drain pipes for fuel oil tanks are not shown.
- *1) To be delivered by external suppliers and to be installed by the shipyard.
- *2) Refer to the "Pipe Connection Plan" for the execution and location of the engine pipe connections.
- *3) To be delivered by the engine manufacturer, i.e. already equipped on engine side.
- *4) All capacities and the given diameters are valid for the mentioned engine rating and serve just as an example. The given tank capacities are based on 8 h settling tank change-over intervals. To make the layout for the project specific rating please refer to design group 9730. Fluid velocities and flow rates, recommended values for pipework of diesel plants. Rating specific flow rates are provided by GTO.
- *5) Valve to be kept closed during normal engine operation. For draining only.
- *6) Separator capacity related to viscosity; layout according to certified flow rate (CFR) recommended.
- *7) A heating coil in the MDO tank is required when DMB is used. Target heating temperature: 40 °C.
- *8) Recommended position for fuel oil sampling to check fuel oil quality.
- *9) Just to be applied if in addition to the fuel drain tank a separate tank for collection of clean MGO is installed to enable the switching between the different tanks depending on the fuel in use.
- *10) Installed as required (check with "Pipe Connection Plan").
- *11) The tank inlet only to be equipped with a swing check valve to avoid inadmissible backpressure.
- *12) The location of the pump's installation must comply with the supplier's requirements by considering the relative height between the pump and the service tank, in combination with the pressure drop of the piping.


- MDO pipes - - - - - Miscellaneous
- MGO pipes - - - - - Drain/overflow pipes
- MDO/MGO pipes - - - - - Air vent pipes
- Pipes on engine - - - - - Pipe connections

Overflow drains from fuel oil settling and service tanks (not shown on drawing)

WINGO Manufacturer and Dealer		FUEL OIL SYSTEM MDO/MGO only, int. pilot FO supply Brennstoffsystem Hauptkreislauf	
Date: 23.10.2018 Drawn date: 23.10.2018 Design Group: 9723 Part: DAAD107654	Scale: 1:22 Sheet: 1/2 Title: PAAD3104.05	U-Case: XXXXXX Standard: ISO 315	Net Weight: 0.001

SPECIFICATION which must be met

X62DF

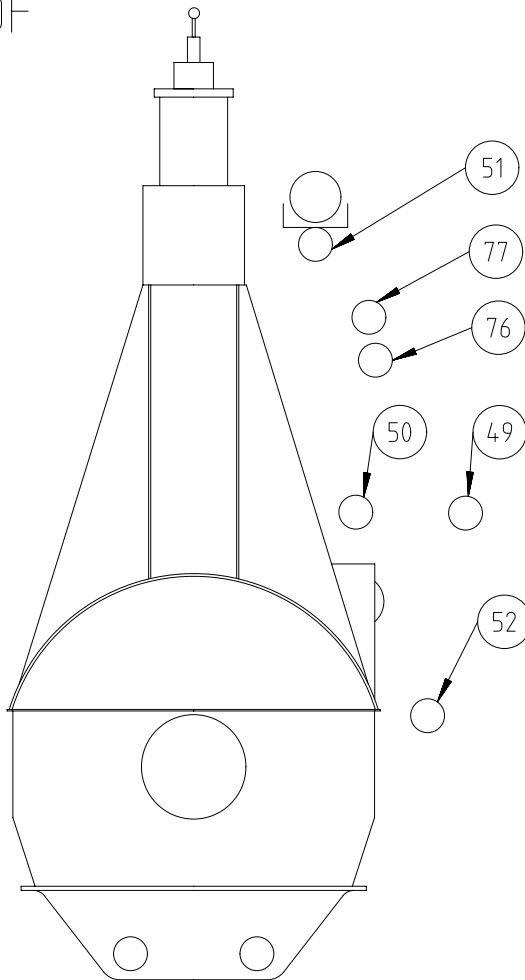

- 76 INLET - Pilot fuel oil
 - Fuel quality, pressure, and viscosity: same as specified for the main fuel oil (connection 49)
 - Volume flow: according to GTD.
- 77 OUTLET - Pilot fuel oil return
 - Normal operation condition: returning to FO supply pump suction.
 - Back pressure at ME outlet: max. 1.5 bar(g).

- 49 INLET - Fuel oil
 - Fuel oil quality: MGO
 - Sulphur content: $\leq 0.1\%$
 - Pressure at engine inlet: stopped engine: 10 bar
 - running engine: 7-10 bar
 - Volume flow: according to GTD
 - Viscosity MGO: 2-17 cSt
 - Filtration:
 - Main fuel oil filter with max. 10 micron (absolute, sphere passing mesh) close to engine inlet.
 - Bypass filter in parallel to the main fuel oil filter with max. 25 micron (absolute, sphere passing mesh).
- 50 OUTLET - Fuel return
 - Normal operation condition: Returning to upstream of the FO supply pump
- 51 OUTLET - Drain rail-unit (dirty)
 - Dirty fuel: Mixed drain (LO,FO) from rail-unit, not for re-use
 - Free flow by gravity to sludge oil tank or appropriate tank.
- 52 OUTLET - Fuel return, pressureless (clean)
 - This pressureless fuel return consists of the following 2 types of clean fuel, namely:
 - 'Normal drainage'
 - Expected (design) fuel return from the fuel pump and injection control side during normal operation.
 - 'Leakage'
 - Unexpected fuel return from an emergency situation only (e.g. high pressure pipe damage).
 - Clean fuel must be collected in a drain tank (or appropriate tank) by gravity free flow
 - Piping must be insulated and heated (50-95°C)

Free space for lic.	Q-Code							XXXXXX		Main Drw.			
	Standard							ISO; JIS					
Modif.	A	EAAD091789	02.12.2019										
		Number	Drawn date	Number	Drawn date	Number	Drawn date	Number	Drawn date				
		Product		5-8X62DF		FUEL OIL SYSTEM MGO only, int. pilot FO supply Brennstoffsystem							
Units	mm kg	NX				Basic Material			Net Weight 0,001				
SURFACE PROTECTION SEE GROUP 0344		Made	23.10.2018 Sudant Deogade		Scale	-		Size	A3	Page	1/2	Material ID	PAAD310408
TOLERANCING PRINCIPLE ISO8015		Chkd	05.07.2019 wwa008 Wang		Design Group		9723		Drawing ID	DAAD107656		Rev.	A
GENERAL TOLERANCES ACCORDING TO ISO2768-mK		Appd	05.07.2019 mhu019 Hug										

SYSTEM PROPOSAL - Combined main fuel oil and pilot fuel supply (for operation on MGO only)

Pos.	Engine Components *3)
EC01	Fuel supply unit
EC02	Fuel rail unit
EC03	Pressure retaining valve
EC04	Pilot fuel supply unit
EC05	Pressure reduction valve

Pos.	System Components *2)
001	Suction strainer (mesh size according to pump suppliers requirement)
002	Supply pump
004	Flowmeter
005	MGO heat exchanger (A)
006	Viscometer
007	Automatic self-cleaning filter, 10 micron (absolute sphere passing mesh size)
008	Fuel oil sampling cock *8)
009	Transition piece (adapter) *7)
010	Fuel drain tank
011	Sludge tank
012	MGO service tank

Pos.	Engine Connections *1) (A)
(49)	INLET - Fuel oil
(50)	OUTLET - Fuel return
(51)	OUTLET - Drain rail-unit (dirty)
(52)	OUTLET - Fuel return, pressureless (clean)
(76)	INLET - Pilot fuel oil
(77)	OUTLET - Pilot fuel oil return

Remarks:

- Air vent and drain pipes must be fully functional at all inclination angles of the ship of which the engine must be operational.
- Overflow and drain pipes for fuel oil tanks are not shown

*1) Refer to the "Pipe Connection Plan" for the execution and location of the engine pipe connections.

*2) To be delivered by external supplier and to be installed by the shipyard.

*3) To be delivered by the engine builder, i.e. already equipped on engine side

*4) All capacities and the given diameters are valid for the mentioned engine rating and serve just as an example. To make the layout in regard to the project specific rating please refer to design group 9730 "Fluid velocities and flow rates, recommended values for pipework of diesel plants" for selecting the appropriate pipe diameter. Rating specific flow rates are provided by GTD.

*6) To be kept closed during normal engine operation. For draining only.

*7) Installed as required (check with the "Pipe Connection Plan")

*8) Recommended position for fuel oil sampling to check fuel oil quality.

*9) The location of the pump's installation must comply with the supplier's requirements by considering the relative height between the pump and the service tank, in combination with the pressure drop of the piping


Number of cylinders		5	6	7	8
Main engine X62DF (R1 rated)	power (kW)	1925	14310	16695	19080
	speed (rpm)	103			

Proposal for dimensioning *4)

MGO service tank	volume (m³)	19	23	27	31
MDO drain tank	volume (m³)	1.9	2.3	2.7	3.1

Nominal pipe diameter (A)	A	DN 32	4.0	4.0	5.0
	B	DN 32	3.2	4.0	4.0
	C	DN 32	3.2	4.0	4.0
	G	DN 20	2.0	2.0	2.0
	H	DN 20	2.0	2.0	2.0

— MGO pipes
 --- Drain / overflow pipes
 = Pipes on engine
 Air vent pipes
 ○ Pipe connections

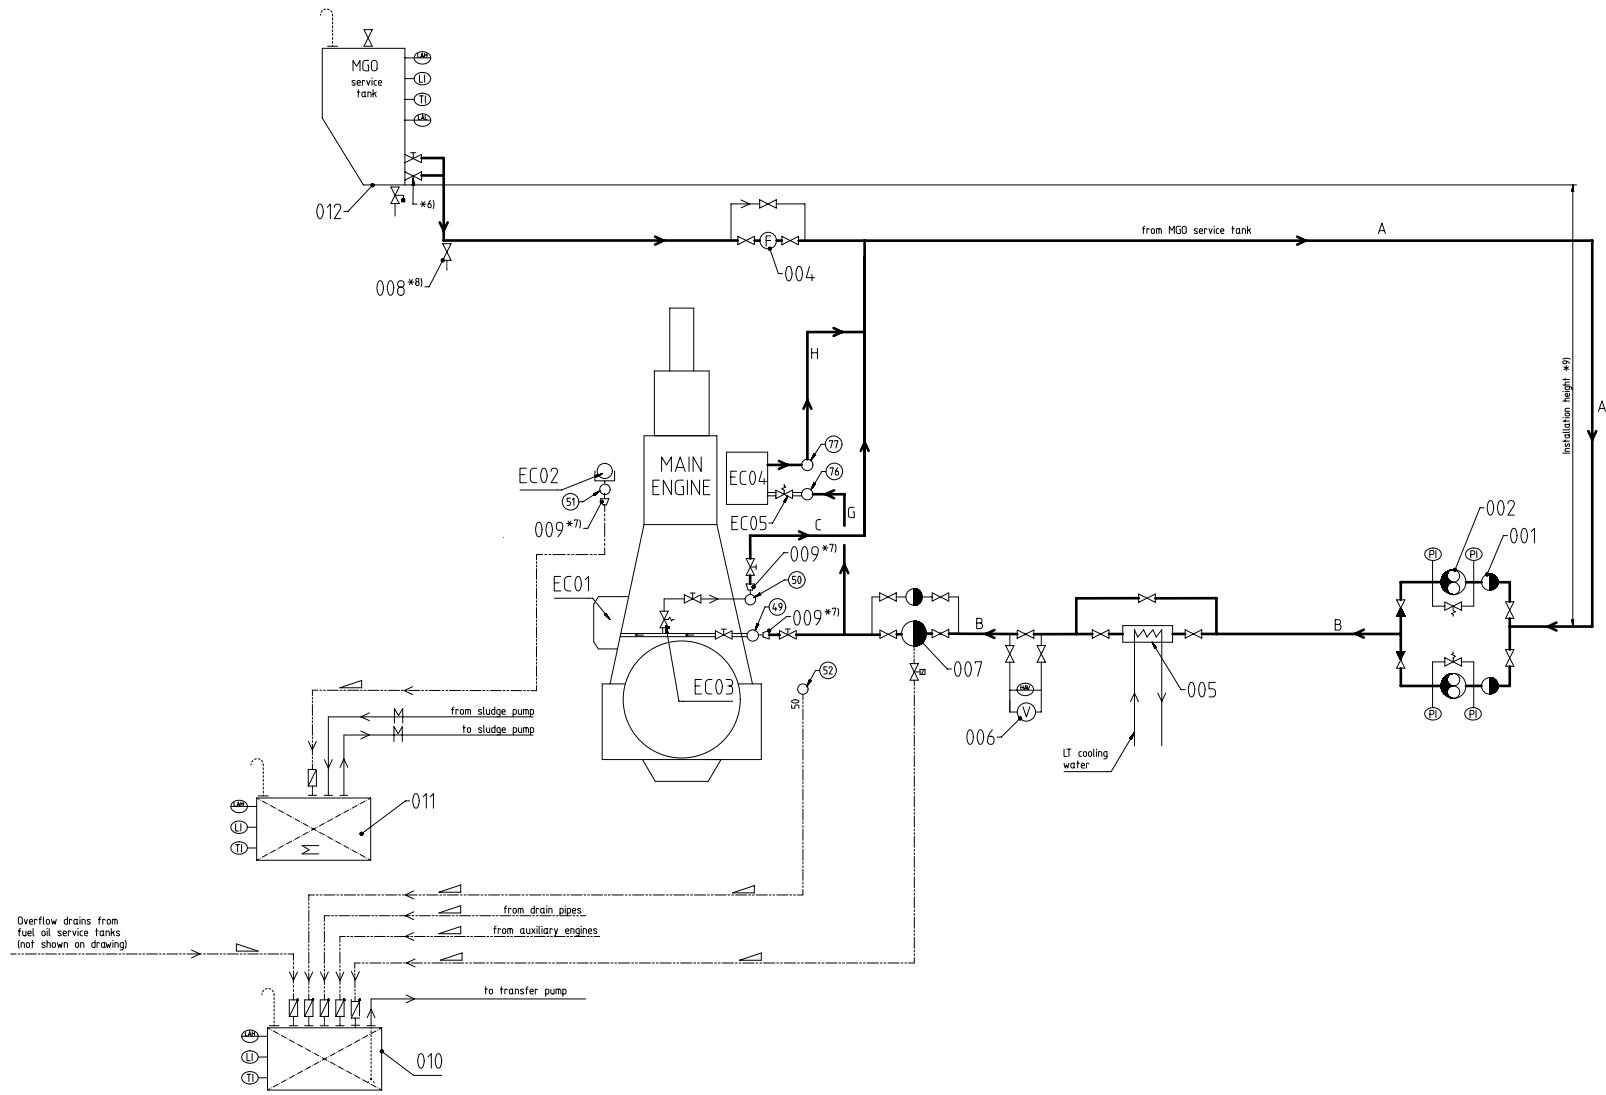

Overflow drains from fuel oil service tanks (not shown on drawing)


from drain pipes

from auxiliary engines

to transfer pump

		FUEL OIL SYSTEM MGO only, int. pilot FO supply Brennstoffsystem	
Date: 23.10.2018 Drawn: [] Checked: [] Approved: []	Scale: 1/2 Sheet: 1/2 Design Group: PAAD3104.08	Project: 9723 Drawing: DAAD107656	Net Weight: 0.001

Copyright Wintec Group Ltd. All rights reserved. No part of this drawing may be reproduced without the written permission of Wintec Group Ltd.

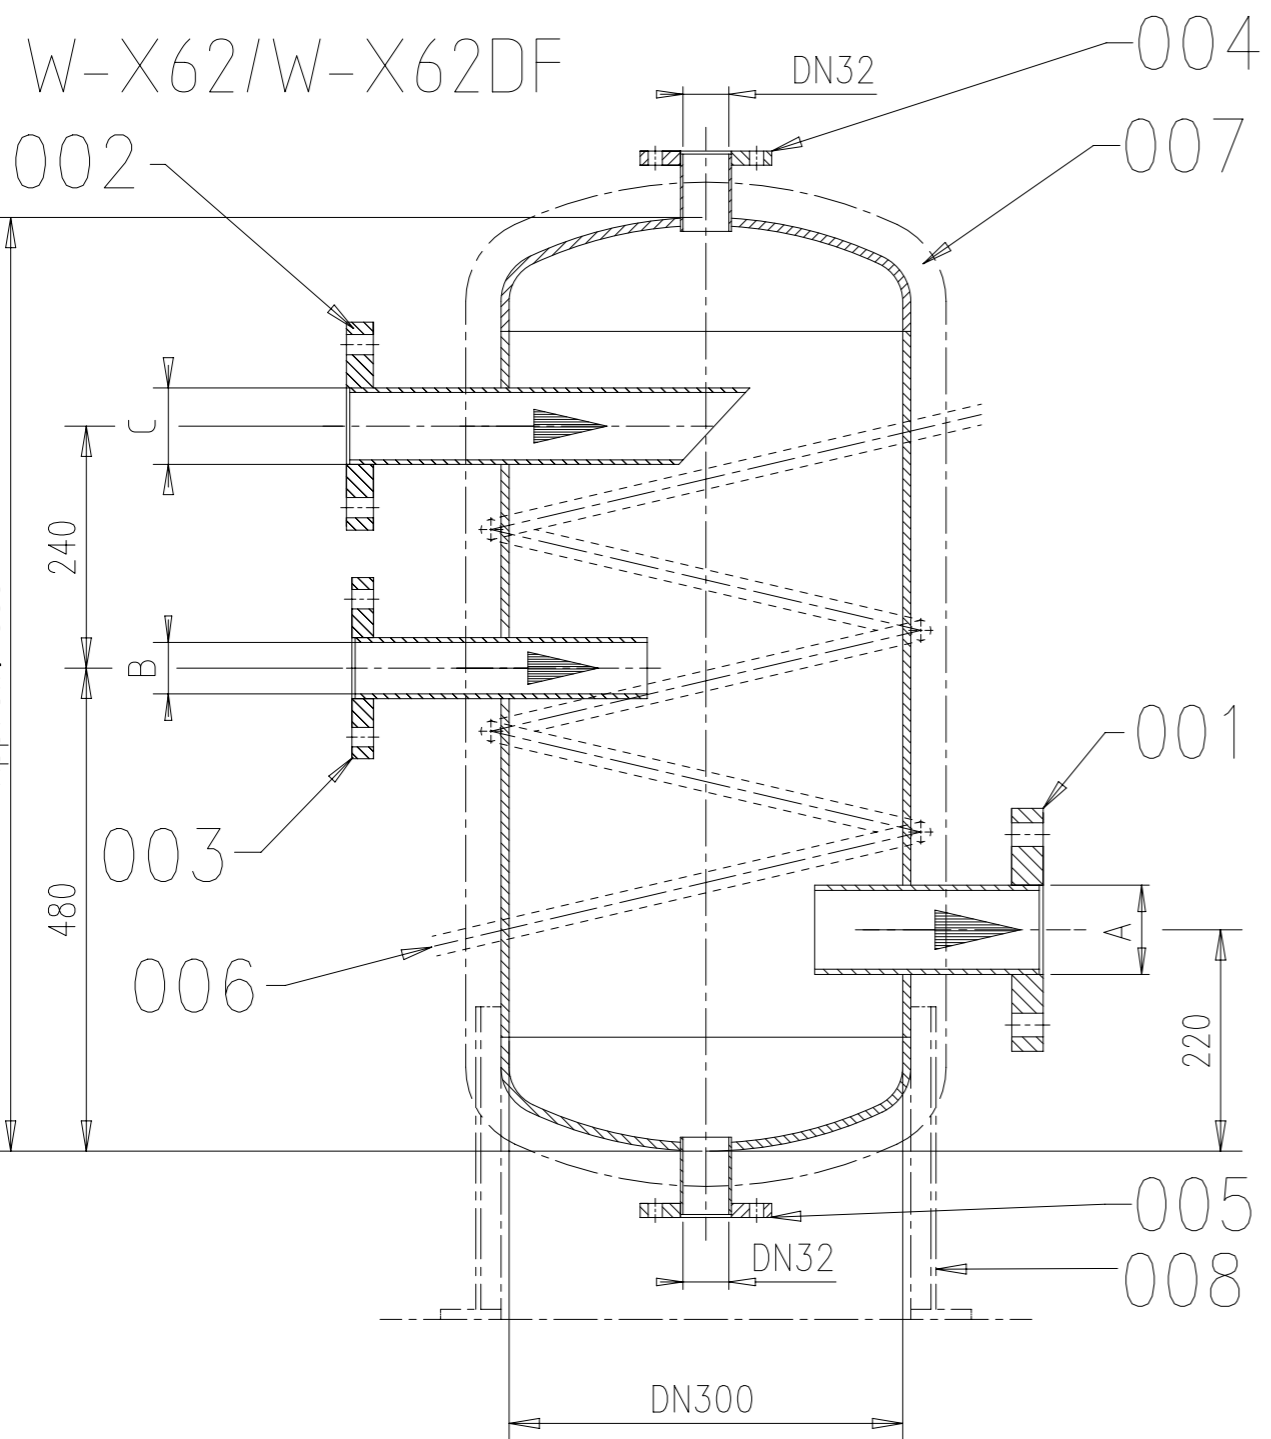

Pos.	Description
001	Outlet
002	Inlet, return line
003	Inlet, from feed pump
004	Outlet safety valve
005	Drain
006	Heating coil
007	Insulation
008	Mounting brackets *1)

Remarks:

- Configuration and dimensioning of the mixing unit have to comply with the relevant classification society/rules.
- *1) Mounting brackets for fixation on floor plate. The mixing unit must not be fitted unsupported under any circumstances.
- *2) Shown on drawing.

Nominal pipe diameters (DN)

No. of cyl.	A	B	C
	DN	DN	DN
4	65	40	50
5	65	40	50
6	80	50	65
7	80	50	65
8	80	50	65

Capacity: 65 l
 Design pressure: 10 bar
 Service temperature: 150 °C

*2)

Free space for ltr.	Q-Code	XXXXX	Main Drw.
	Standard	ISO; JIS	

Modif. A	EAAD087849	14.06.2017							
	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number	Drawn date	Number


 Product W-62
MIXING UNIT TO FUEL OIL SYSTEM

Units	mm kg	NX	Basic Material	Net Weight 0.001
-------	-------	----	----------------	------------------

SURFACE PROTECTION SEE GROUP 0344	Chkd	30.11.2012	ase06	A.Sekulic	Scale	-	Size	A3	Page	1/1	Material ID	PAAD100322
TOLERANCING PRINCIPLE ISO8015	Appd	30.11.2012	wvr001	Wroblewski	Design Group	9723	Drawing ID	DAAD031429		Rev.	A	
GENERAL TOLERANCES ACCORDING TO ISO2768-mK												

MIDS - WinGD X62DF/X62DF-2.0 - FUEL-OIL-SYSTEM (DG9723)

TRACK CHANGES

DATE	SUBJECT	DESCRIPTION
2016-11-07	DRAWING SET	First web upload
2017-08-18	DAAD031429	Mixing unit drg - new revision
2018-10-02	DAAD053320	System drg - new revision
2019-07-18	DAAD053318	Main and system drg - new revision
	DAAD107654 DAAD107656	System drgs for MDO/MGO only - added
2020-09-30	DAAD053320	System drgs - new revision
	DAAD107654 DAAD107656	
2020-11-25	DAAD053320	System drg - new revision

DISCLAIMER

© Copyright by Winterthur Gas & Diesel Ltd.

All rights reserved. No part of this document may be reproduced or copied in any form or by any means (electronic, mechanical, graphic, photocopying, recording, taping or other information retrieval systems) without the prior written permission of the copyright owner.

THIS PUBLICATION IS DESIGNED TO PROVIDE AN ACCURATE AND AUTHORITATIVE INFORMATION WITH REGARD TO THE SUBJECT-MATTER COVERED AS WAS AVAILABLE AT THE TIME OF PRINTING. HOWEVER, THE PUBLICATION DEALS WITH COMPLICATED TECHNICAL MATTERS SUITED ONLY FOR SPECIALISTS IN THE AREA, AND THE DESIGN OF THE SUBJECT-PRODUCTS IS SUBJECT TO REGULAR IMPROVEMENTS, MODIFICATIONS AND CHANGES. CONSEQUENTLY, THE PUBLISHER AND COPYRIGHT OWNER OF THIS PUBLICATION CAN NOT ACCEPT ANY RESPONSIBILITY OR LIABILITY FOR ANY EVENTUAL ERRORS OR OMISSIONS IN THIS BOOKLET OR FOR DISCREPANCIES ARISING FROM THE FEATURES OF ANY ACTUAL ITEM IN THE RESPECTIVE PRODUCT BEING DIFFERENT FROM THOSE SHOWN IN THIS PUBLICATION. THE PUBLISHER AND COPYRIGHT OWNER SHALL UNDER NO CIRCUMSTANCES BE HELD LIABLE FOR ANY FINANCIAL CONSEQUENTIAL DAMAGES OR OTHER LOSS, OR ANY OTHER DAMAGE OR INJURY, SUFFERED BY ANY PARTY MAKING USE OF THIS PUBLICATION OR THE INFORMATION CONTAINED HEREIN.